


Quickconnect™ Flexible Sprinkler Connector

Anchoring components are intended for use with drop ceilings conforming to ASTM C635 and other major standards when installed in accordance with the Standard Practice for installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels, ASTM C636 or other equivalent standards

Component List:

No	Part Name	Material	Qty.
1	Flexible Tube	SS304	1
2	Nut	S10C	2
3	Isolation Ring	Nylon66	1
4	O-Ring	Silicon	1
5	Reducer	Zinc Plated Steel	1
6	Nipple	Zinc Plated Steel	1
7	Center Bracket	Zinc Plated Steel	1
8	End Bracket	Zinc Plated Steel	2
9	Square Bar	Zinc Plated Steel	1

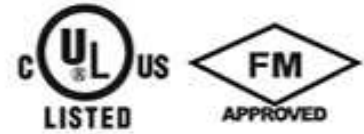

Technical Date

- Rated Pressure: 175PSI
- Maximum Ambient Temperature : 225(°F), 170 (°C)
- Maximum Sprinkler K-factor for 1/2 in. outlet: 5.6gal/mm/(psi)1/2
- Maximum Sprinkler K-factor for 3/4 in. outlet: 8.0gal/mm/(psi)1/2
- Designed for use in Wet and Dry Systems
- Minimum Bend Radius: 8In/200mm

Maximum Number of bends.

- 3 bends for 1200-1800mm lengths
- 2 bends for 800-950mm lengths
- 1 bend for less than 800mm

STANDARD LENGTHS

Model	In/mm	Hose assembly length, ft (m)
FX(B)-07	1/2(15mm) or 3/4(20mm) outlet	0.70m(2.30ft long)
FX(B)-10	1/2(15mm) or 3/4(20mm) outlet	1.00m(3.30ft long)
FX(B)-12	1/2(15mm) or 3/4(20mm) outlet	1.20m(4.00ft long)
FX(B)-15	1/2(15mm) or 3/4(20mm) outlet	1.50m(4.93ft long)
FX(B)-18	1/2(15mm) or 3/4(20mm) outlet	1.80m(5.90ft long)
FX(B)-20	1/2(15mm) or 3/4(20mm) outlet	2.00m(6.56ft long)
FX(B)-25	1/2(15mm) or 3/4(20mm) outlet	2.50m(8.20ft long)
FX(B)-28	1/2(15mm) or 3/4(20mm) outlet	2.80m(9.17ft long)

NB. Other Lengths are available on special order.

-packing: 20 pieces per carton per each size

FXB: BRAID TYPE

FX: UNBRAID TYPE

Design and materials subject to change without notice

Fivalco® and Firaliser® are Registered Trade Marks

Copyright Fivalco 2006

